

Redexim



TOP DRESSING



R i n k

1520

The 1520 makes large area spreading easier. This trailed unit holds over two tons of wet or dry top dressing, running on large, low-ground pressure flotation wheels. Power to move the self-aligning belt is hydraulic, and either the tractor direct or optional tank and pump is PTO powered. The spread thickness is controlled by belt speed and gate, and the standard drop spread width of 60 inches (1.40 meters), making this the most versatile top dresser.


FEATURE	BENEFIT
Precise Metering	Each model enables fine control over density for neat and economical operation
Roller Provides Accurate Scattering of Sand	Allows continued use of turf area
Ideal Weight Distribution	Prevents compaction and damage to turf

TOP DRESSING

Rink 1520



SPECIFICATIONS	DESCRIPTION
Length	150" (3.85 m)
Road Width	74" (1.87 m)
Road Width	60" (1.40 m)
Height	64" (1.70 m)
Weight	1,870 lbs (848 kg)
Capacity	2.5 cu. yd. (2.0 cu. m.)
Tractor Required	25 hp
Hydraulics Required	6.6 gpm/2,100 psi
Options	Auxiliary tank and pump unit, infill kit

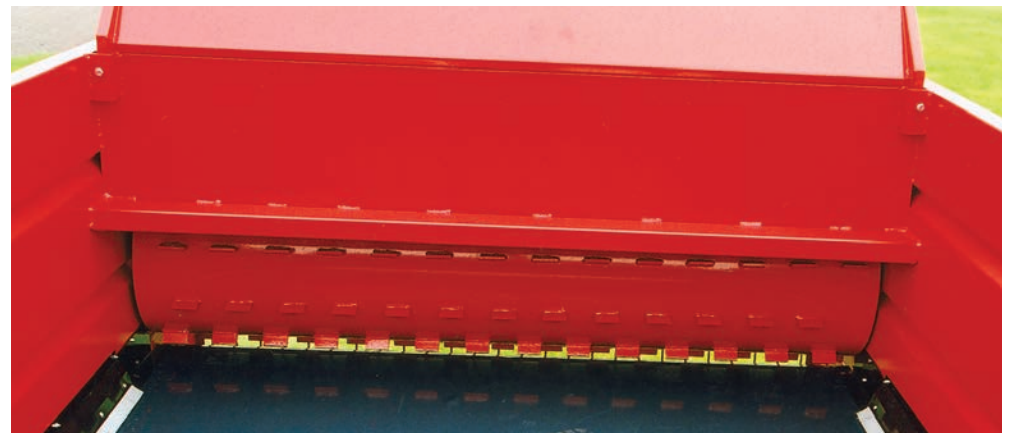

The most versatile top dresser

